



MANUAL CHAIN HOIST



Chain Hoist

Electric hoist is a kind of special lifting equipment, referred to as electric hoist. It is installed on suspended I-beams, curved rails, cantilever lifting guide rails and fixed lifting points. It mainly completes heavy lifting, loading and unloading, equipment maintenance, and cargo lifting, etc. Work is an indispensable mechanical equipment for infrastructure projects such as construction, highway, metallurgy and mining.

Compact Design / High Load Capacity / Easy Maintenance

Performance parameter

Rated lifting capacity (t)	0.5	1	1.5	2	3	5	10	20	20
Standard lifting height(m)	2.5	2.5	2.5	3	3	3	3	3	3
Max hand pull force(N)	225	300	310	310	350	400	410	410x2	410x2
Number of lifting chain rows	1	1	1	1	2	2	4	8	12
Net weight(kg)	6.25	10.6	13	15.3	21	38	70	156	246

FIXED ELECTRIC CHAIN HOIST



Performance parameter

Rated lifting capacity (t)	0.5	1	2	3	5	10	15	20	25
Standard lifting height(m)	3	3	3	3	3	6	6	6	6
Lifting speed: single hook/ double hook(m/min)	6.8, 6.9/2.3	6.8, 6.9/2.3	6.6, 6.8/2.3	5.4, 5.4/1.8	2.8, 2.7/0.9	2.7, 2.7/0.9	1.8, 1.8/0.6	1.4, 4.5/0.6	1.1, 1.2/0.4
Number of lifting chain rows	1	1	1	1	2	4	6	8	10
Net weight(kg)	47	61	115	122	151	335	451	546	624

TRAVELING ELECTRIC CHAIN HOIST



Performance parameter

Rated lifting capacity (t)	0.5	1	2	3	5	10	15	20	25
Standard lifting height(m)	3	3	3	3	3	6	6	6	6
Lifting speed: single hook/ double hook(m/min)	6.8, 6.9/2.3	6.8, 6.9/2.3	6.6, 6.8/2.3	5.4, 5.4/1.8	2.8, 2.7/0.9	2.7, 2.7/0.9	1.8, 1.8/0.6	1.4, 4.5/0.6	1.1, 1.2/0.4
Number of lifting chain rows	1	1	1	1	2	4	6	8	10
Net weight(kg)	89	103	164	183	234	335	451	546	624

LOW HEADROOM ELECTRIC CHAIN HOIST



Performance parameter

Rated lifting capacity (t)	0.5	1	2	3	5	7.5	10
Standard lifting height(m)	3	3	3	3	3	3	6
Lifting speed: single hook/ double hook(m/min)	6.8, 6.9/2.3	6.6, 6.9/2.3	6.6, 6.8/2.3	5.4, 5.4/1.8	2.8, 2.7/0.9	1.8, 1.8/0.6	2.7, 2.7/0.9
Number of lifting chain rows	1	1	1	1	2	3	4
Net weight(kg)	47	61	115	122	151	266	335

EXPLOSION-PROOF ELECTRIC CHAIN HOIST



Performance parameter

Rated lifting capacity (t)	0.5	1	2	3	5	10	15	20	25
Standard lifting height(m)	3	3	3	3	3	6	6	6	6
Lifting speed: single hook/ double hook(m/min)	6.8, 6.9/2.3	6.8, 6.9/2.3	6.6, 6.8/2.3	5.4, 5.4/1.8	2.8, 2.7/0.9	2.7, 2.7/0.9	1.8, 1.8/0.6	1.4, 4.5/0.6	1.1, 1.2/0.4
Number of lifting chain rows	1	1	1	1	2	4	6	8	10
Net weight(kg)	89	103	164	183	234	335	451	546	624



Wire Rope Electric Hoist

A wire rope electric hoist is a lightweight and compact lifting device that uses an electric motor to drive a reducer, which rotates the drum to wind or unwind the wire rope, thereby lifting or lowering heavy loads. It primarily consists of an electric motor, reducer, drum, wire rope, hook, control system, and safety devices. Known for its compact structure, lightweight design, small footprint, versatile components, and user-friendly operation, it is widely used in industries such as manufacturing, construction, warehousing, and docks for material handling, equipment installation, and heavy-load positioning tasks.

Flexible Control / Reliable Safety / Energy-Efficient

CD WIRE ROPE ELECTRIC HOIST



Performance parameter

Lifting capacity (t)	0.5	1	2	3	5	10	16
Lifting height (m)	6-18	6-30	6-30	6-30	6-30	6-30	6-30
Lifting speed (m/min)	8	8	8	8	8	7	3.5
Running speed (m/min)	20	20	20	20	20	20	20
Working Class	M3-M4	M3-M4	M3-M4	M3-M4	M3-M4	M3-M4	M3-M4
Control method	Handle / Remote control						
Power supply	3P 380V 50HZ						


MD WIRE ROPE ELECTRIC HOIST



Performance parameter

Lifting capacity (t)	0.5	1	2	3	5	10	16
Lifting height (m)	6-18	6-30	6-30	6-30	6-30	6-30	9-30
Lifting speed (m/min)	8/0.8	8/0.8	8/0.8	8/0.8	8/0.8	7/0.7	3.5/0.35
Running speed (m/min)	20	20	20	20	20	20	20
Working Class	M3-M4	M3-M4	M3-M4	M3-M4	M3-M4	M3-M4	M3-M4
Control method	Handle / Remote control						
Power supply	3P 380V 50HZ						


DJCD/DJMD LOW HEADROOM WIRE ROPE ELECTRIC HOIST

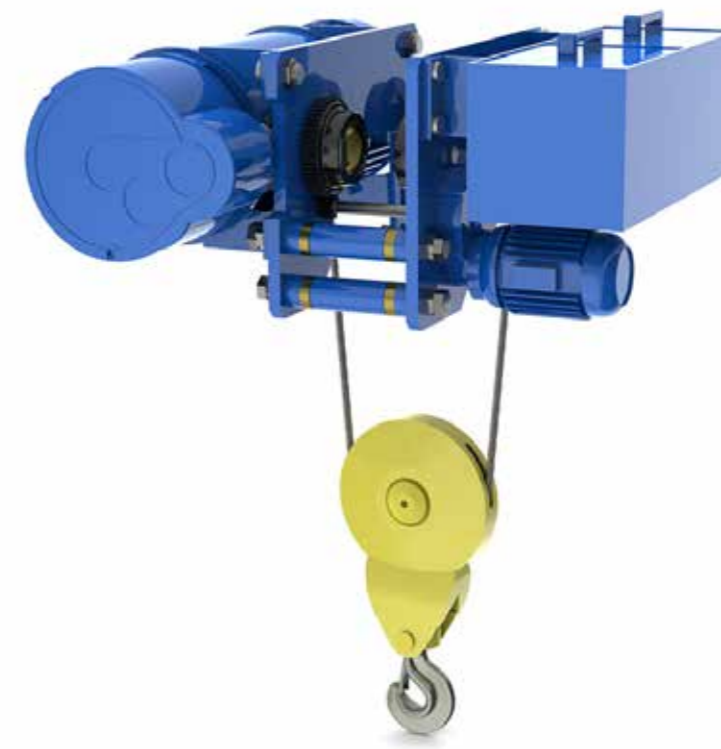

Performance parameter

Lifting capacity (t)	2	6	5	10	16
Lifting height (m)	6-12	6-12	6-12	6-12	9-12
Lifting speed (m/min)	8,8/0.8	8,8/0.8	8,8/0.8	7,7/0.7	3.5,3.5/0.35
Running speed (m/min)	20	20	20	20	20
Working Class	M3-M4	M3-M4	M3-M4	M3-M4	M3-M4
Control method	Handle / Remote control				
Power supply	3P 380V 50HZ				

PLANETARY WIRE ROPE ELECTRIC HOIST

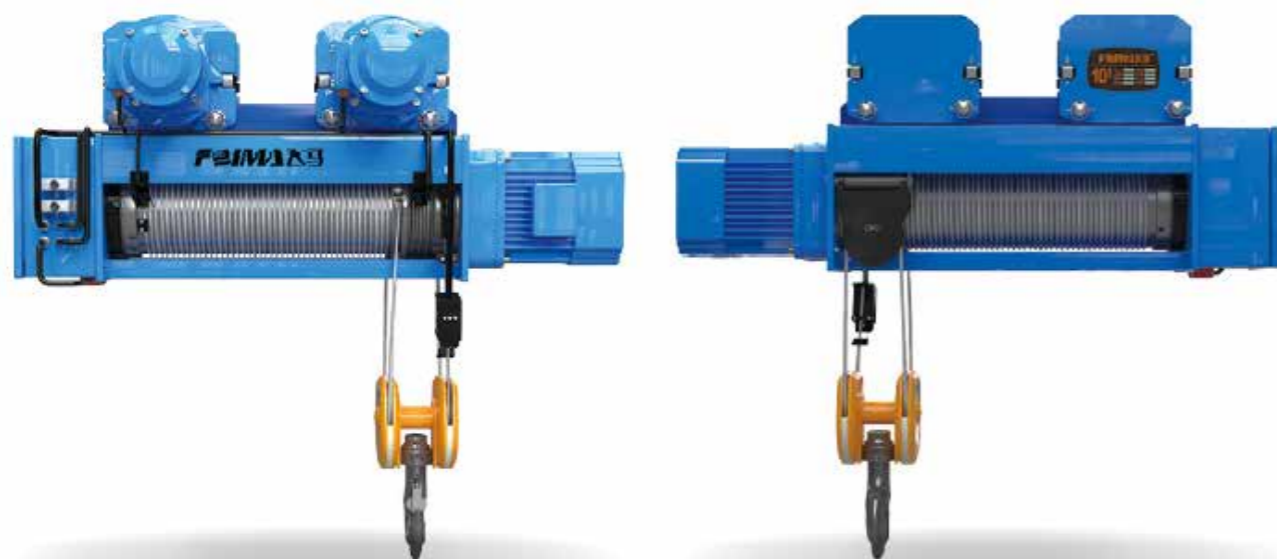

Performance parameter

Lifting capacity (t)	2	3	5	10	16	20	32
Lifting height (m)	6-30	6-30	6-30	6-30	9-24	9-24	9-24
Lifting speed (m/min)	10,10/3.3	10,10/3.3	8,8/2.6	8,8/2.6	4,4/1	3.5,3.5/1	2,2/0.67
Running speed (m/min)	20	20	20	20	20	20	20
Working Class	M3-M4	M3-M4	M3-M4	M3-M4	M3-M4	M3-M4	M3-M4
Control method	Handle / Remote control						
Power supply	3P 380V 50HZ						

EXPLOSION-PROOF WIRE ROPE ELECTRIC HOIST



Performance parameter

Lifting capacity (t)	0.5	1	2	3	5	10	16
Lifting height (m)	6-18	6-30	6-30	6-30	6-30	6-30	9-24
Lifting speed (m/min)	8,8/0.8	8,8/0.8	8,8/0.8	8,8/0.8	8,8/0.8	7,7/0.7	3.5,3.5/0.35
Running speed (m/min)	20	20	20	20	20	20	20
Working Class	M3-M4	M3-M4	M3-M4	M3-M4	M3-M4	M3-M4	M3-M4
Explosion-proof grade	Exd II BT4/CT4 GB						
Control method	Explosion-proof handle / remote control						
Power supply	3P 380V 50HZ						

METALLURGY ELECTRIC HOIST (FOR LIFTING MOLTEN METAL)



Performance parameter

Lifting capacity (t)	2	3	5	10
Lifting height (m)	6-24	6-24	6-24	6-24
Lifting speed (m/min)	8,8/0.8	8,8/0.8	8,8/0.8	7,7/0.7
Running speed (m/min)	20	20	20	20
Working Class	M6	M6	M6	M6
Heat shield	Rock wool steel plate			
Braking method	Motor braking + safety braking			
Control method	Remote control			
Power supply	3P 380V 50HZ			

NR EUROPEAN LOW HEADROOM ELECTRIC HOIST



Performance parameter

Lifting capacity (t)	3	5	10	16	20
Lifting height (m)	6-18	6-18	6-18	6-18	6-18
Lifting speed (m/min)	5/0.8	5/0.8	5/0.8	4/0.7	4/0.7
Running speed (m/min)	5-20	5-20	5-20	5-20	5-20
Rail width (mm)	150-400	150-400	200-450	200-500	200-500
Working Class	M5	M5	M5	M5	M5
Control method	Handle / Remote control				
Power supply	3P 380V 50HZ				